

ALL IN ONE ECO-E64WX AIR-COOLED ESS CABINET

ECO-E64WX is a small capacity PV-plus ESS solution provided by Sunpal through its long-term accumulation in the field of ESS integration and digital monitoring technology. Adopting the all-in-one design concept, this PV-plus ESS cabinet highly integrates equipment such as lithium battery ESS, hybrid inverter, HVAC, FSS, BCQ, etc. The product has a more compact structure, easy installation, and flexible capacity expansion, supporting multiple operating modes such as self use, peak shaving, and backup power.



Economic & Efficient

RTE over 87%, DOD over 95%.



Safe & Reliable

IP55, optimized ventilation design, temperature difference within 6°C



Compact & Convenient

0.96 m² footprint, easy to transport and install



Expandable & Modular

Easy modular design supports parallel connection for convenient system expansion.



Versatile

Support multiple brands of hybrid inverter, with higher selectivity.



PV pluggable

Support PV connection, with higher integration.




Self-developed

PACK, BMS and EMS are all independently developed with good compatibility.



Easy O&M

Support multiple ways of operation and maintenance, including onsite, cloud.

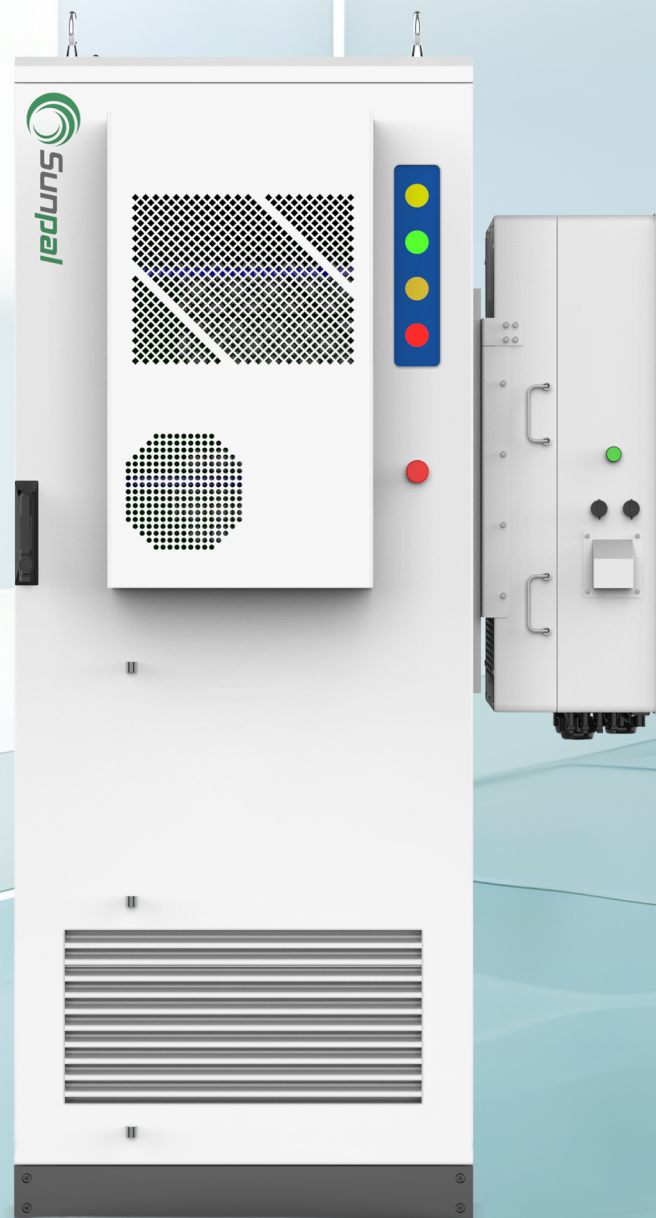

Model	ECO-E64WX				
Battery Input					
Cell Type	LFP 120Ah				
Battery System	1P168S				
Rated Energy	64.512kWh				
Rated Voltage	537.6V				
Voltage Range	470.4V~604.8V				
PV Input					
Recommended Input Power Max	37.5kW	45kW	54kW	60kW	75kW
PV Voltage	200V~850V				
MPPT	4				
MAX. Input Current	30A*4				
AC Output					
Rated Power	25kW	30kW	36kW	40kW	50kW
Max. Power	27.5kVA	33kVA	39.6kVA	44kVA	55kVA
Nominal Voltage	400Vac/3P+N+PE				
Nominal Frequency	50Hz/60Hz				
THDi	< 3%				
DC Ratio	< 0.5%I _{pn}				
Power Factor	0.8 leading~0.8 lagging				
General					
Efficiency	≥87%				
Charge/Discharge Rate	0.8P Max.				
DoD	95%(25±2°C)				
Cycle Life	≥5500 Cycles				
Ingress Rating	IP55				
Cooling	Force air colling				
Operating Temperature	-25~55°C				
Humidity	0~95%RH, non-condensing				
Altitude	≤2000m(derating above 2,000m)				
Dimensions (W*D*H)	800*1200*2030mm				
Weight	1 t				
Fire Safety	Aerosol				
Connective	Ethernet/RS485				
Compliance	UN38.3, IEC62477, IEC61000, IEC62619, IEC63056, UL9540A, EN50549				
Grid Connection Certifications	G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1 / EN 50549-10, VDE 0126 / UTE C 15 / VFR:2019, NTS 631 / RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA, PORTARIA N° 140, DE 21 DE MARÇO DE 2022				